





- Touch operation, easy to improve production efficiency
- High-quality LED light source, long service life, energy saving and environmental protection
- Easy to install, durable, fully sealed, protection class IP69K


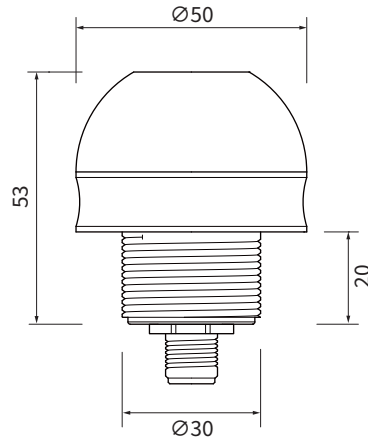


Universal bracket accessories

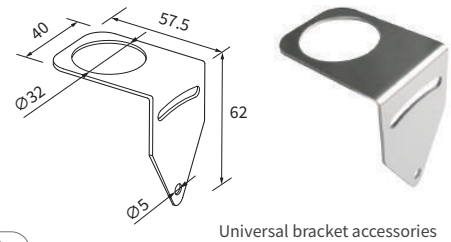



OM - T50 Touch Signal Light

T 5 0 - 1 0 1 B N - R Y G
 (layers) (rated voltage) (function) (wire Connecting) (signal Color)
 1 layer 3 colors 01=DC 12~30V B=Steady P=NPN N=PNP R=Red Y=Yellow G=Green



(Input voltage 12~30V work light work)

wiring	before touch	after touch
pin 1 brown(+) + pin 4 black(-)		● red LED
pin 1 brown(+) + pin 3 blue(-) + pin 4 black(-)	● green LED	● yellow LED



(Input voltage 12~30V work light work)

wiring	before touch	after touch
pin 1 brown(+) + pin 4 black(-)		● red LED
pin 1 brown(+) + pin 3 blue(-) + pin 4 black(-)	● green LED	● yellow LED

Orbital Mekatronik Systems Pvt. Ltd.

Unit No. 134 & 132, Building C7, Bhumi world, Mumbai Nashik highway, Pimplas, Bhiwandi-421302, Maharashtra, INDIA

• Tel: +91 2522 672359 • Email: marketing@orbitalmekatronik.com • Website: www.orbitalmekatronik.com